

MD1S THRU MD7S

MINIATURE GLASS PASSIVATED SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER



康比電子
HORNBY ELECTRONIC

REVERSE VOLTAGE: 50 to 1000 VOLTS

FORWARD CURRENT: 0.5 AMPERE

FEATURES

- Surge overload rating: 30 amperes peak
- Ideal for printed circuit board
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Low leakage
- Reliable low cost construction utilizing molded


MECHANICAL DATA

Case: Molded plastic, MD-S

Epoxy: UL 94V-O rate flame retardant

Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed

Mounting position: Any

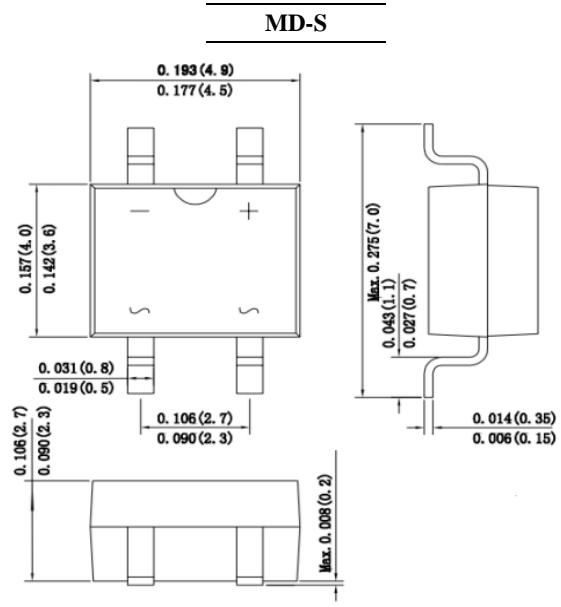

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	MD1S	MD2S	MD3S	MD4S	MD5S	MD6S	MD7S	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current (see Fig. 1) on glass-epoxy P.C.B (Note 2) on aluminum substrate (Note 3)	I _(AV)								Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}								Amp
Maximum Forward Voltage at 0.4A DC and 25°C	V _F								Volts
Maximum Reverse Current at T _A =25°C at Rated DC Blocking Voltage T _A =125°C	I _R								uAmp
Typical Junction Capacitance (Note 1)	C _J								pF
Typical Thermal Resistance (Note 3)	R _{0JA}								°C/W
Typical Thermal Resistance (Note 2)	R _{0JL}								°C/W
Operating and Storage Temperature Range	T _J , T _{Stg}						-55 to +150		°C

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3mm) pads

3- On aluminum substrate P.C.B. with an area of 0.8" x 0.8" (20 x 20mm) mounted on 0.05 x 0.05" (1.3 x 1.3mm) solder pad

MD1S THRU MD7S

MINIATURE GLASS PASSIVATED SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER



康比電子
HORNBY ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 - Derating Curve for Output Rectified Current

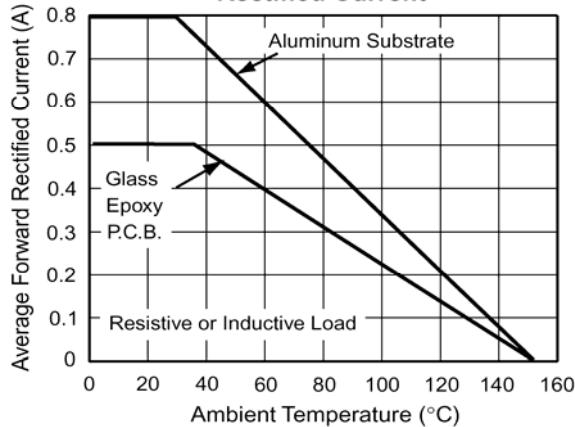


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg

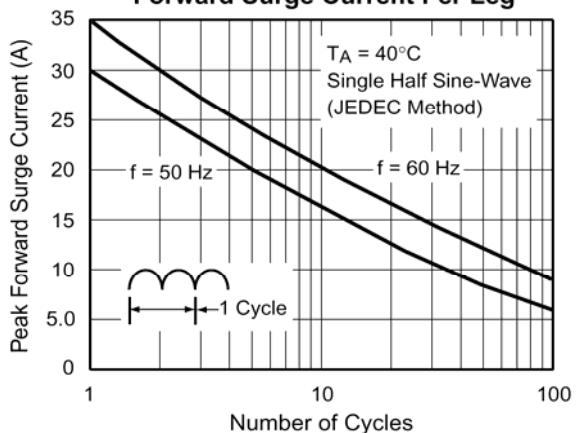


Fig. 3 - Typical Forward Voltage Characteristics Per Leg

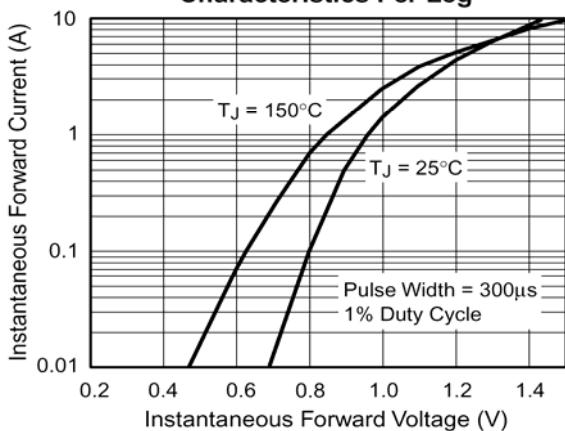


Fig. 4 - Typical Reverse Leakage Characteristics Per Leg

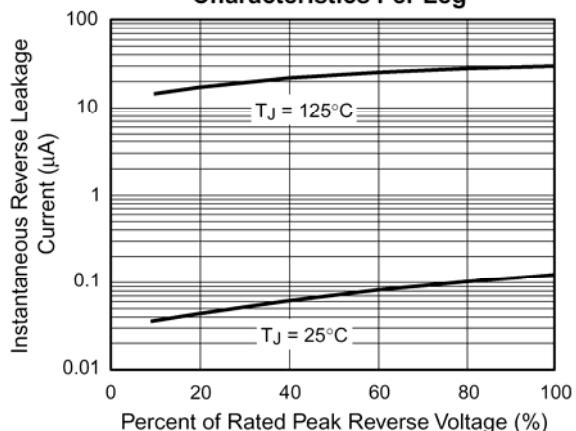


Fig. 5 - Typical Junction Capacitance Per Leg

